


DECKING INSTALLATION GUIDELINES





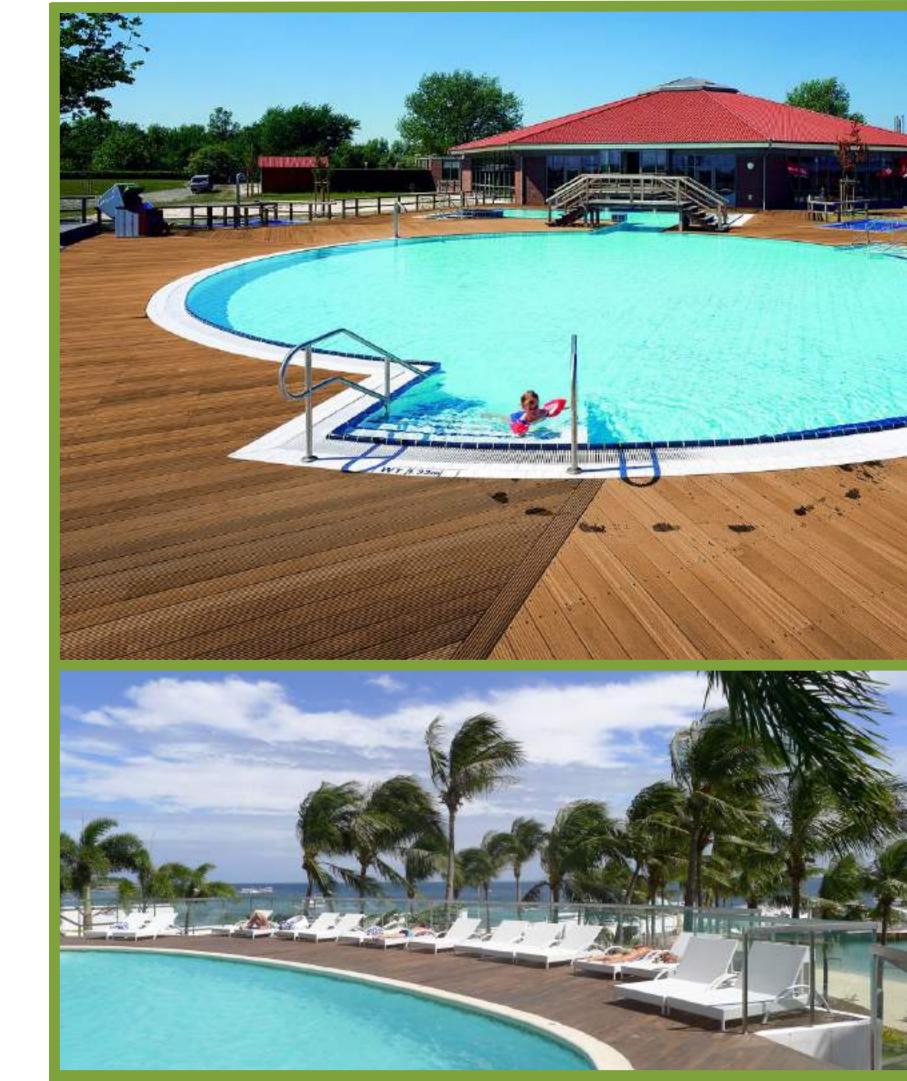

THANK YOU FOR YOUR PURCHASE!




Congratulations with your new Solid Wood Decking! We have prepared this presentation for your Decking installation guide.

We are available for any further questions that you may have, and we thank you for your purchase.





DECKING INSTALLATION GUIDE

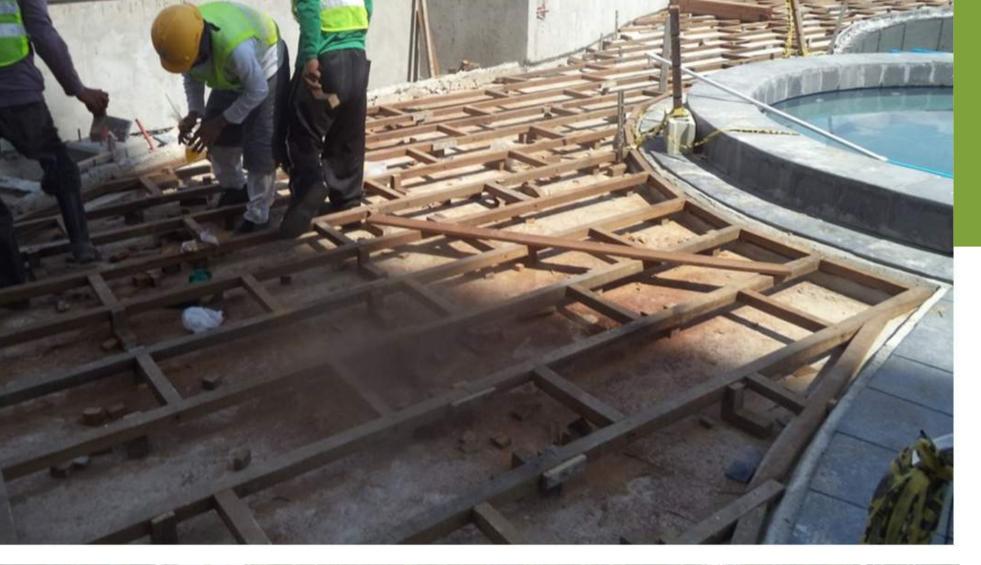




Preparation of the Slab

 Make sure that the ground is acceptably sloped underneath the deck to eliminate standing water under the structure and the slope is directly to the canal or floor drain.



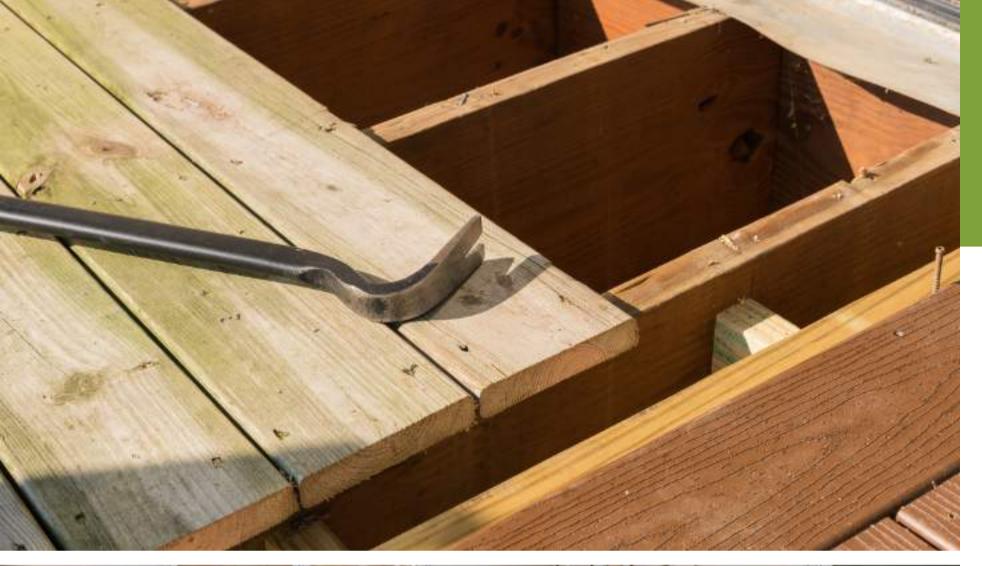





Installation of wood nailers over concrete

 The minimum thickness of wood nailer which can be used over a slab is 19mm. Attach the wood nailers to the slabs using pre-drill sleeves pins only.



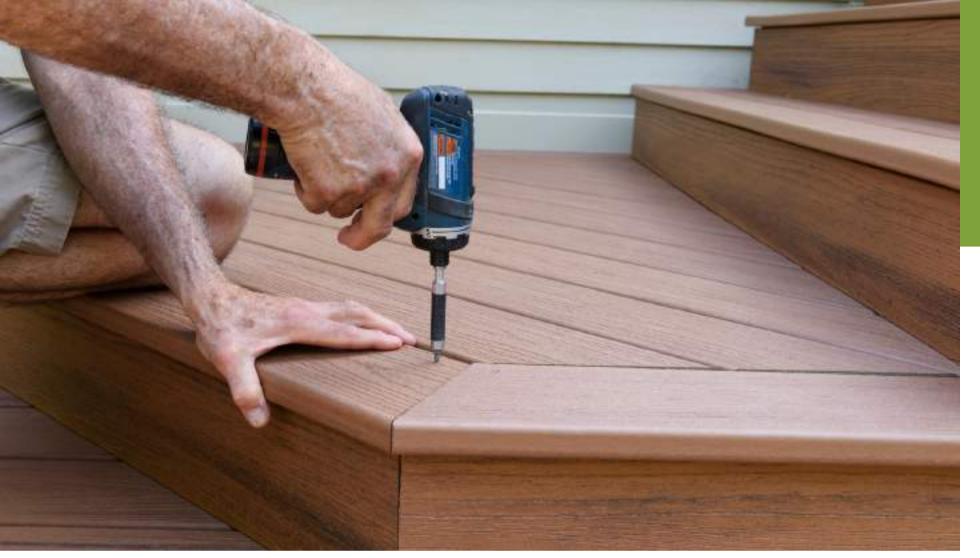

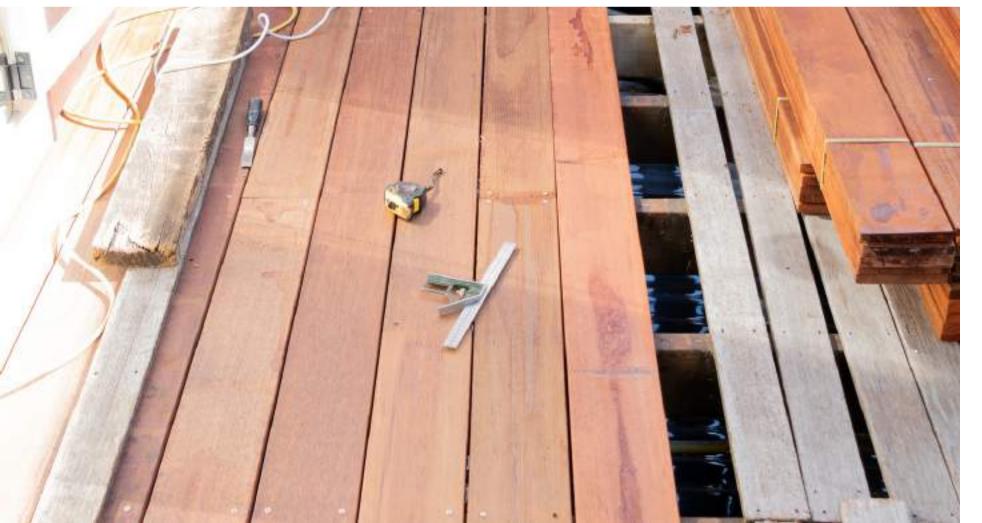

Fastening Hardwood Decking

- Usage of fasteners or screws crafted of anything other than 305 or higher-grade stainless steel will result in unattractive discoloration and blemishes to the wood surrounding the fastener.
- Pre-drilling is required when attaching deck boards to prevent splitting, which can damage the deck boards and cause them to become loose over time. The pilot hole should be the same diameter as the shank of the screw, and slightly deeper than the length of the screw.







Deck Board Gap Spacing

 Every time installing decking, make sure to set a space between deck boards of minimum 3mm. The variation in gap spacing is to make certain that the decking has room to expand and contract depending on the material used and the atmosphere where it is installed.







SOLIDWOOD brand is fully owned by FILTRA Timber, the Philippines' leading importer/distributor of sustainable timber products.

www.filtratimber.com